

Metro



Prepaid

SUB METERS FOR TENANTS

METUSA METRO DIGITAL PREPAID METER

SINGLE PHASE

A single phase encryption enabled prepayment meter with PayNearMe integrated vending of Metro Codes.

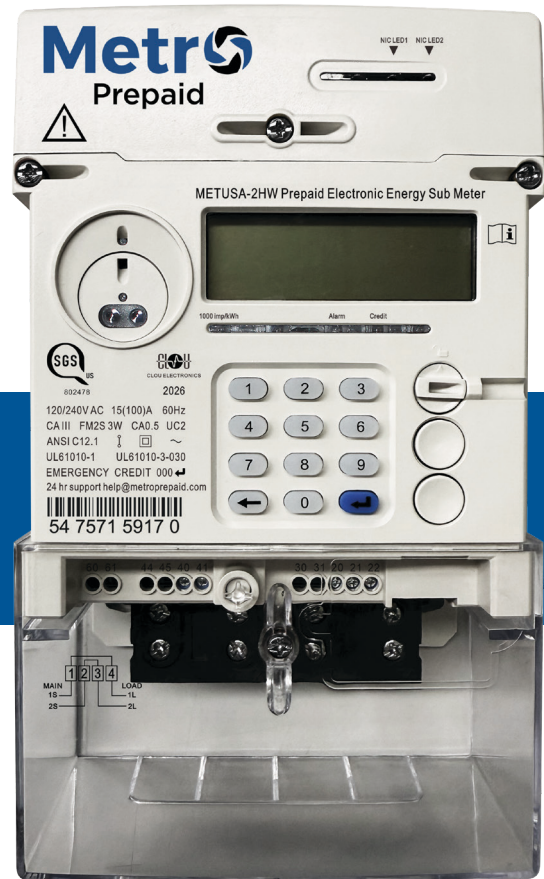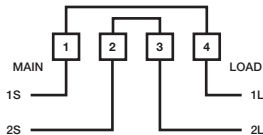

Technical Parameters

| Wiring Mode | Rated Current (Ib) | Max. Current (Imax) |
|-----------------------------------|-----------------------------------|-----------------------|
| Single Phase Two-wire 1S2S1L2L | 5A | 100A |
| Starting Current (0.4% Ib) | Rated Voltage (Un) | Working Voltage Range |
| 20mA | 120-240VAC | 80% Un ~ 120%Un |
| Rated Frequency (fn) | Accuracy Class | Meter Constant |
| 60Hz ± 5% | Active: IEC Class 1.0 | Active: 1000imp/kWh |
| Voltage Circuit Power Consumption | Current Circuit Power Consumption | Working Temperature |
| ≤1W 10VA | ≤4VA | -20°C~70°C |