

Metro


Prepaid

SUB METERS FOR TENANTS

METUSA-3 METRO DIGITAL PREPAID METER

THREE PHASE

A three phase (3x120/208, 277/480V) encryption enabled prepayment meter with PayNearMe integrated vending of Metro Codes. Luckins TSI code: METUSA-3

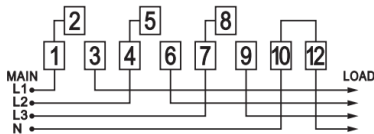

Technical Parameters

Wiring Mode	Rated Current (Ib)	Max. Current (I _{max})
3P4W L1L1L2L2L3L3N	5A	100A
Starting Current (0.4% I _b)	Rated Voltage (U _n)	Working Voltage Range
20mA	3x120/208, 277/480V	80% U _n ~ 120%U _n
Rated Frequency (fn)	Accuracy Class	Meter Constant
60Hz ± 5%	Active: IEC Class 1.0	Active: 1000imp/kWh
Voltage Circuit Power Consumption	Current Circuit Power Consumption	Working Temperature
≤2W 10VA	≤4VA	-20°C~70°C