

Metro


Prepaid

SUB METERS FOR TENANTS

METUSA METRO DIGITAL PREPAID METER

SINGLE PHASE

A single phase encryption enabled prepayment meter with PayNearMe integrated vending of Metro Codes.

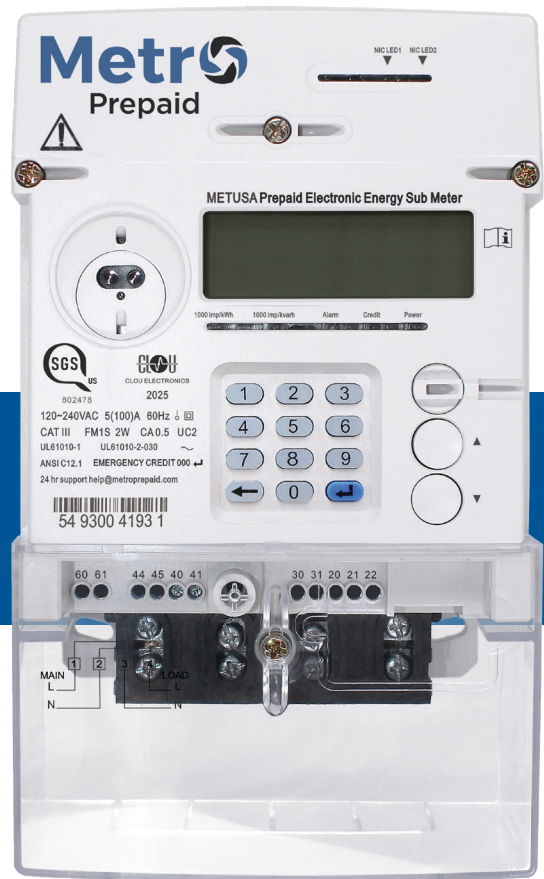

Technical Parameters

Wiring Mode	Rated Current (Ib)	Max. Current (Imax)
Single Phase Two-wire LLNN	5A	100A
Starting Current (0.4% Ib)	Rated Voltage (Un)	Working Voltage Range
20mA	120-240VAC	80% Un ~ 120%Un
Rated Frequency (fn)	Accuracy Class	Meter Constant
60Hz ± 5%	Active: IEC Class 1.0	Active: 1000imp/kWh
Voltage Circuit Power Consumption	Current Circuit Power Consumption	Working Temperature
≤1W 10VA	≤4VA	-20°C~70°C